

# ROUND TOP WALL COPING



## APPLICATION

Seal the coping to the wall with adhesive mortar or polymer. It is recommended to use adhesive between the copings.

The distance between the wall and the coping edge must be equal or superior to 40mm.





## BENEFITS

- Easy to install.
- Durability.
- Aesthetic.
- Available in grey and white.



# ROUND TOP WALL COPING

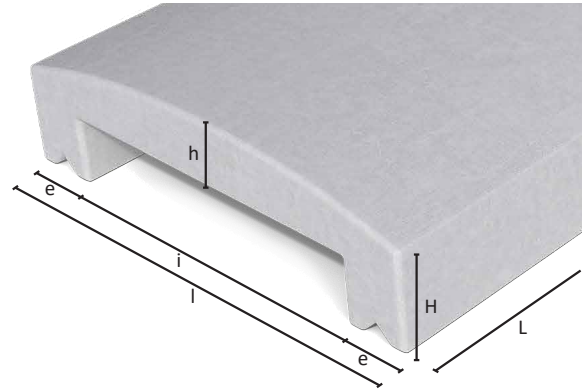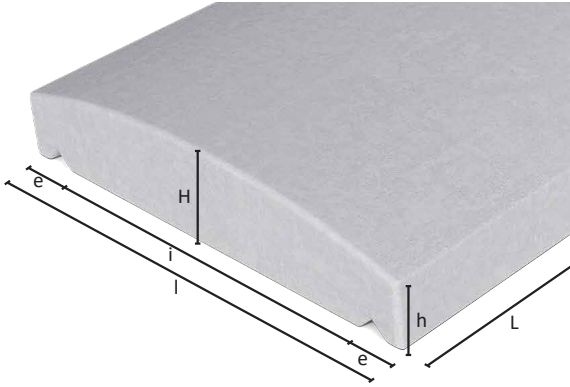

## CONCRETE INFORMATION

CRITERIA	STANDARD CONCRETE
Density	2050 Kg/m <sup>3</sup>
Compressive strength	C25/30
Exposure class	XC1
% of water absorption	< 7%
Dimensional tolerance	+/- 2mm
Components	Portland cement ; sand ; gravel ; limestone filler ; expanded clay ; adjuvants ; water.

## PRODUCT INFORMATION

### Round top wall coping - Standard Concrete

Reference	Designation	Dimensions l x L x e x i x H x h (Δ±2) (mm)	Wall (mm)	Unit weight (Kg) Δ ±5%	Un. / pallet	Weight/pallet (Kg) Δ ±5%	Format/pallet l x L x H (mm)
CH001	Round top wall coping 28	280 x 1000 x 30 x 220 x 60 x 40	150	30,000	30	925	1100 x 1100 x 650
CH002	Round top wall coping 33	330 x 1000 x 30 x 270 x 60 x 40	200	35,000	20	725	1100 x 1100 x 650
CH003	Round top wall coping 42	420 x 1000 x 30 x 360 x 65 x 55	300	53,000	20	1085	1100 x 1100 x 650
		<b>Wall coping with docking system</b>					
CH004	Round top wall coping 34	340 x 1000 x 60 x 210 x 80 x 40	200	38,000	20	785	1100 x 1100 x 650
CH005	Round top wall coping 34	340 x 1000 x 40 x 260 x 80 x 40	250	33,000	20	685	1100 x 1100 x 650