

TWICE WEATHERED WALL COPING



APPLICATION

Seal the coping to the wall with adhesive mortar or polymer. It is recommended to use adhesive between the copings.

The distance between the wall and the coping edge must be equal or superior to 40mm.




BENEFITS

- Easy to install.
- Durability.
- Aesthetic.
- Available in grey and white.



TWICE WEATHERED WALL COPING

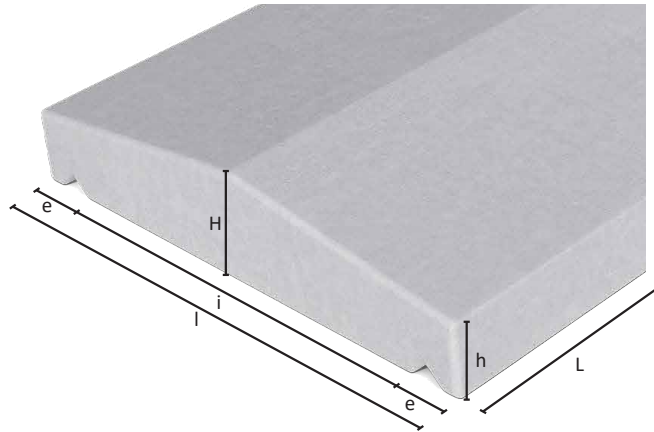

INFORMATIONS BÉTON

| CRITERIA | STANDARD CONCRETE |
|------------------------------|---|
| <i>Density</i> | 2050 Kg/m ³ |
| <i>Compressive strength</i> | C25/30 |
| <i>Exposure class</i> | XC1 |
| <i>% of water absorption</i> | < 7% |
| <i>Dimensional tolerance</i> | +/- 2mm |
| <i>Components</i> | Portland cement ; sand ; gravel ; limestone filler ; expanded clay ; adjuvants ; water. |

PRODUCT INFORMATION

Twice weathered wall coping - Standard concrete

| Ref | Designation | Dimensions l x L x e x i x H x h (Δ±2) (mm) | Wall (mm) | Unit weight (Kg) Δ ±5% | Un. / pallet | Weight/pallet (Kg) Δ ±5% | Format /pallet l x L x H (mm) |
|-------|--------------------------------|--|--------------|---------------------------|-----------------|-----------------------------|----------------------------------|
| CH035 | Twice weathered wall coping 25 | 250 x 1000 x 30 x 190 x 60 x 40 | 100 ou 150 | 26,500 | 30 | 820 | 1100 x 1100 x 750 |
| CH030 | Twice weathered wall coping 28 | 280 x 1000 x 30 x 220 x 60 x 40 | 150 | 30,000 | 30 | 925 | 1100 x 1100 x 750 |
| CH033 | Twice weathered wall coping 31 | 310 x 1000 x 30 x 250 x 60 x 40 | 200 | 33,000 | 20 | 685 | 1100 x 1100 x 670 |
| CH034 | Twice weathered wall coping 35 | 350 x 1000 x 30 x 290 x 60 x 40 | 250 | 38,000 | 20 | 785 | 1100 x 1100 x 670 |
| CH036 | Twice weathered wall coping 33 | 330 x 1000 x 30 x 270 x 70 x 50 | 200 | 46,000 | 20 | 945 | 1100 x 1100 x 670 |
| CH037 | Twice weathered wall coping 55 | 550 x 500 x 30 x 490 x 60 x 40 | 450 | 29,000 | 20 | 605 | 1100 x 1100 x 670 |