

# FLAT TOP WALL COPING



## APPLICATION

Seal the coping to the wall with adhesive mortar or polymer. It is recommended to use adhesive between the copings.

The distance between the wall and the coping edge must be equal or superior to 40mm.




## BENEFITS


- Easy to install.
- Durability.
- Aesthetic.
- Available in grey and white.



# FLAT TOP WALL COPING

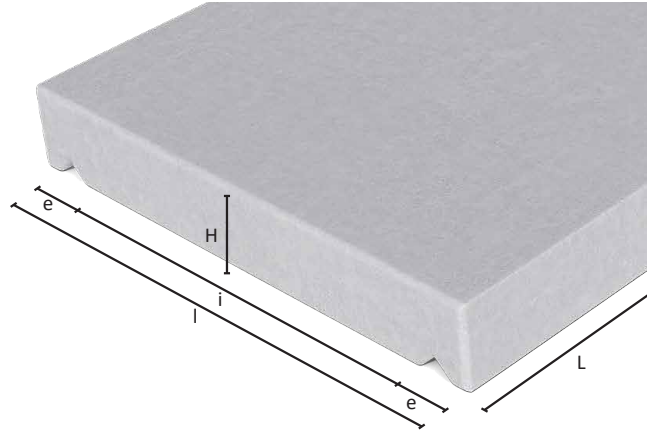

CONCRETE INFORMATION	
CRITERIA	STANDARD CONCRETE
Density	2050 Kg/m <sup>3</sup>
Compressive strength	C25/30
Exposure class	XC1
% of water absorption	< 7 %
Dimensional tolerance	+/- 2mm
Components	Portland cement ; sand ; gravel ; limestone filler ; expanded clay ; adjuvants ; water.

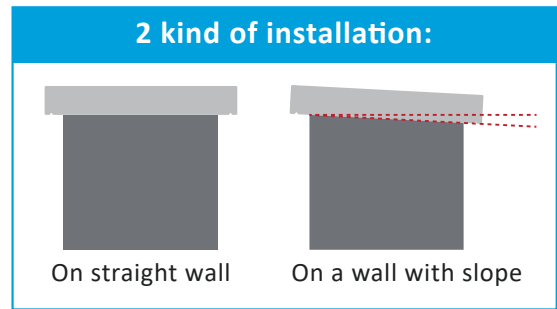

PRODUCT INFORMATION							
Flat top wall coping - Standard concrete							
Ref.	Designation	Dimensions (Δ±2) (mm) l x L x e x i x H	Wall (mm)	Unit weight (Kg) Δ ±5%	Un. / pallet	Weight/pallet (Kg) Δ ±5%	Format / pallet l x L x H (mm)
CH010	Flat top wall coping 24	240 x 1000 x 30 x 180 x 45	140	23,000	40	945	1100 x 1100 x 650
CH011	Flat top wall coping 28	280 x 1000 x 30 x 220 x 40	180	24,000	30	745	1100 x 1100 x 650
CH012	Flat top wall coping 32	320 x 1000 x 30 x 260 x 40	220	28,000	30	865	1100 x 1100 x 650
CH013	Flat top wall coping 46	460 x 1000 x 30 x 400 x 45	350	44,000	20	905	1100 x 1100 x 650