



VIPREMI
PRÉFABRIQUÉS EN BÉTON

CONCRETE CONE d52.5 AVRI* TYPE

For the later sealing of the holes left by the AVRI anchoring fastener.

*(*AVRI: marque déposée par SATECO)*



APPLICATION

- Use installation products: hydraulic based with resin which grain size < 0,5 mm for works with no tightness constraints.
- Follow the technical instructions of use of the installation products.
- The direction of application is not relevant to ensure a perfect sealing. Nevertheless, whenever tightness is required, the biggest diameter should be placed on the water side.

- Instructions :

1. The conical hole must be clean and with no trace of grease.
2. Moisten the hole and the cone in warm weather.
3. The mortar has to be plastic because the excess of water can affect the quality of the bedding mortar.
4. Apply the bedding mortar over the cone.
5. Then insert the cone with a rotary movement.
6. Complete the work by tapping lightly over the concrete cone.
7. Make the grouts with the mortar, preferably with shrinkage compensated.




BENEFITS

- Quick and easy to install.
- Same material as the wall structure.
- Acoustic and thermal barrier.
- Waterproof.





CÔNE BÉTON d52.5 TYPE AVRI*

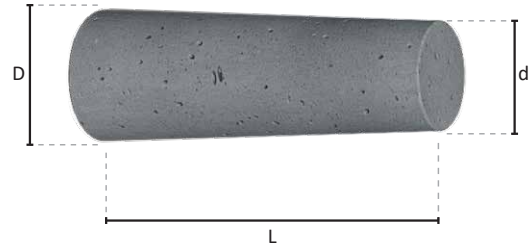

INFORMATIONS BÉTON

CRITERIA	STANDARD CONCRETE
<i>Density</i>	2000 Kg/m ³
<i>Compressive strength</i>	C25/30
<i>Exposure class</i>	XC2
<i>% of water absorption</i>	< 6%
<i>Dimensional tolerance</i>	+/- 2mm
<i>Components</i>	Portland cement; limestone filler; expanded clay; sand; gravel; adjuvants ; water.

PRODUCT INFORMATION

Cone d52.5 - AVRI Type - STANDARD CONCRETE

Reference	Dimensions L x D x d (Δ±2) (mm)	Wall (mm)	Un. weight (Kg) Δ ±5%	Un./ box	Boxes/ pallet	Un./ pallet	Weight/box (Kg) Δ ±5%	Pallet weight (Kg) Δ ±5%	Pallet format l x L x H (mm)
CB52.5/64M160	150 x 64 x 52,5	160	0,800	15	108	1620	12	1320	800 x 1200 x 1110
CB52.5/65.3M180	170 x 65,3 x 52,5	180	0,930	15	90	1350	14	1285	800 x 1200 x 1050
CB52.5/66.6M200	190 x 66,6 x 52,5	200	1,060	15	90	1350	16	1460	800 x 1200 x 1150
CB52.5/69M250	240 x 69 x 52,5	250	1,400	15	72	1080	21	1540	800 x 1200 x 1150
CB52.5/73M300	290 x 73 x 52,5	300	1,800	15	54	810	27	1485	800 x 1200 x 1150